

## Communication from Public

**Name:** Nona Varnado

**Date Submitted:** 12/05/2019 09:39 AM

**Council File No:** 19-1515

**Comments for Public Posting:** The city needs to support safe active transportation infrastructure, especially bike lanes. This is necessary for achieving stated goals of reducing traffic accidents, especially ones in which vulnerable populations - cyclists, walkers and other non-drivers. It is a morally repulsive response to oppose (and especially to remove) any on-street markings, infrastructure or other protections that minimize the reality of great physical harm to innocent people. The motivation for denying or removing any of these protections has only monstrous and nonsensical rationale in being 'faster' or more convenient for car traffic. This is an absolutely unacceptable way to manage a decision in which human life is at stake. There is a massive amount of academic and city funded research on this from across the United States, including California. I am attaching a classic study from Texas, another state that is often unsure of how to value life over cars, but who have been able to produce findings that are unambiguous in the necessity for on-street protections. Conclusions are on page 23.



# Effects of Shared Lane Markings on Bicyclist and Motorist Behavior along Multi-Lane Facilities

**Prepared by:**

The City of Austin Bicycle Team  
John Brady, Jeff Loskorn, Alison Mills, Jen Duthie, Randy Machemehl  
Center for Transportation Research  
The University of Texas at Austin  
Phone: (512) 471-4541  
Fax: (512) 475-8744  
Email: [johnbrady.jb@gmail.com](mailto:johnbrady.jb@gmail.com)

**Prepared for:**

The City of Austin  
Bicycle and Pedestrian Program  
Department of Public Works

Draft Submitted June 18, 2010

# Table of Contents

Acknowledgements.....	4
Executive Summary .....	5
Background.....	6
Shared Lane Markings Detail.....	7
Site Descriptions.....	8
Along Guadalupe Street between W 20 <sup>th</sup> Street and W Cesar Chavez Street.....	8
Along E 51 <sup>st</sup> Street between Airport Boulevard and IH-35.....	9
Along Dean Keeton Street between San Jacinto Boulevard and Guadalupe Street.....	10
Experimental Design and Research Methodology.....	12
Terminology .....	14
Results.....	15
Southbound on Guadalupe Street at 12 <sup>th</sup> Street.....	16
Westbound Along E 51 <sup>st</sup> Street Approaching Airport Boulevard.....	17
Eastbound Along E 51 <sup>st</sup> Street Departing Airport Boulevard .....	19
Westbound on Dean Keeton Street at San Jacinto Boulevard .....	21
Conclusions and Recommendations .....	23
References .....	24
Appendix A: Bicycle Count Data .....	25

## List of Figures

Figure 1. A drawing and photograph of the Shared Lane Marking used in this study.....	7
Figure 2. A cross-section of Guadalupe Street approaching the intersection with 12th Street .....	8
Figure 3. A map of the intersection of Guadalupe and 12th Street .....	9
Figure 4. Cross-section of Westbound 51st Street approaching the intersection with Airport Boulevard.....	9
Figure 5. Shared Lane Marking installed on E 51st Street.....	10
Figure 6. Cross-section of Westbound Dean Keeton Street departing the intersection with San Jacinto Boulevard.....	10
Figure 7. Shared Lane Marking position near the study site on Dean Keeton Street.....	11
Figure 8. Method for taking LPB and LPM measurements using different measurement axes .....	13
Figure 9. Distribution of bicyclist lateral position along Guadalupe Street during non-passing events.....	16
Figure 10. Notable comparisons on Guadalupe Street.....	17
Figure 11. Distribution of bicyclist lateral position approaching Airport Boulevard during non-passing events .....	17
Figure 12. Notable comparisons on E 51st Street westbound approaching Airport Boulevard.....	18
Figure 13. Distribution of bicyclist lateral position on E 51st Street departing Airport Boulevard during passing events.....	19
Figure 14. Notable comparisons on E 51st Street Eastbound departing Airport Blvd.....	20
Figure 15. Distribution of bicyclist lateral position on Dean Keeton Street during non-passing events.....	21
Figure 16. Distribution of bicyclist lateral position on Dean Keeton Street during passing events.....	21
Figure 17. Notable comparisons on Dean Keeton Street.....	22

## **Acknowledgements**

The authors would like to thank the City of Austin for sponsoring this research and particularly the following staff for their assistance. From the Bicycle and Pedestrian Program, the authors thank Annick Beaudet, Nadia Barrera, Nathan Wilkes, and Jason Fialkoff. From the City's Traffic Management Center, the authors thank Ali Mozdbar, Jonathan Lammert, Kenneth Moses, and Brian Craig.

## Executive Summary

Census data and research surveys have shown that the number of trips made by bicycle in Austin is increasing. While Austin has a sizeable network of bicycle lanes, many gaps remain where roadways are too narrow to accommodate separated facilities. It is a considerable challenge to retrofit existing roadways to accommodate bicycles, so a need exists for planning and engineering tools that allow for motorists and bicyclists to share roadways safely. One potential tool to meet this need is the Shared Lane Marking. This roadway marking, also known as a “sharrow,” is placed in the position within the roadway lane that is deemed to be the safest position for bicyclists with the goals of encouraging bicyclists to ride along the sharrow, and to alert motorists to expect bicyclists at this position. This marking is included in the newly released 2009 Manual of Uniform Traffic Control Devices (MUTCD). At the time the research in this report began, the 2009 MUTCD had not been released so a request for experimentation was approved by the Federal Highway Administration.

The primary goal of this study was to determine what effect, if any, sharrows have on bicyclist and motorist safety. Therefore, pre- and post-implementation data for each site were compared to determine if the markings improved safety. First, safe bicyclist behavior was defined by three factors: (1) riding in the lane position indicated by the sharrow, (2) not riding outside of the lane (on the sidewalk or in empty parking spaces), and (3) not riding alongside queues of stopped vehicles. Second, safe motorist behavior was defined by three factors: (1) motorists give adequate space to bicyclists when passing, (2) motorists did not encroach on adjacent lanes when passing, and (3) motorists make complete lane changes when passing. To test for a change in behavior, sharrows were installed along 51<sup>st</sup> Street (between Airport Boulevard and IH-35), along Guadalupe Street (between Cesar Chavez Street and Martin Luther King Boulevard), and Dean Keeton Street (in various locations), and video footage was recorded before and after marking installation. Along Dean Keeton Street, the sharrows were placed to the right of center in the lane, since the lane is wide enough to allow motorists and bicyclists to operate side-by-side. At the other sites, the sharrows were placed in the center of the lane.

When sharrows were placed in the center of the lane, a significant change occurred in average bicyclist lateral position, away from the curb and towards the center of the lane. This result was significant both when bicyclists were being passed by motor vehicles and when no passing was occurring, but was more pronounced in the latter instance. On Dean Keeton Street, average bicyclist lateral position during passing events did not change significantly, but the standard deviation decreased substantially after the installation of the marking. This resulted in more predictable bicyclist behavior as bicyclists tended to follow the path of sharrows. Additionally, improvement in motorist behavior during passing events was also observed. At several sites, motorists were more likely to change lanes when passing and less likely to encroach on the adjacent lane during passing events. This suggests that motorists were made more aware of bicyclists by the presence of the Shared Lane Marking. Generally, fewer bicyclists rode on sidewalks or in empty parking stalls after sharrows were installed. However, at sites where bicyclists were approaching the intersection, the number of bicyclists riding around a queue of vehicles to get to the front of the line remained unchanged or increased after the installation of sharrows. These mixed results show that Shared Lane Markings may not always be effective at reducing unsafe bicyclist maneuvers. While none of the results can individually quantify safety, the collective observations in this study strongly suggest that Shared Lane Markings, when used as either a stand alone device or as a tool to connect facilities with bicycle lanes, improve safety on multi-lane roadways that are too narrow to accommodate bicycle lanes.

## Background

Since Austin's bicycle program was re-established in 1992, the city has seen a significant growth in bicycle facilities. Douma and Cleaveland (2008) documented a statistically significant increase in bicycle mode share in Austin from 1990 (0.87%) to 2000 (1.19%) in Census block groups with new bicycle routes developed during that period. During that time period, the journey-to-work bicycle mode share for Austin increased significantly from 0.76% to 0.95%. The University of Texas at Austin is the most-frequented destination in Austin with approximately 68,000 students, faculty and staff members. The university estimates 5-7% of all trips to campus are made by bicycle (BMA, 2007).

While the proportion of commuting trips made by bicycle appears to be increasing, it remains small. Surveys studying the factors affecting bicycling demand show safety to be a major concern. In a survey of bicyclists in Texas, 69% of respondents stated they feel bicycling is "somewhat dangerous" or "very dangerous" from the standpoint of traffic crashes (Sener et al., 2009). Unfortunately many roadways were not designed to be wide enough to accommodate bicyclists in a separate lane, so bicycle lanes are often disconnected at points where the roadway narrows. The experiment described here was undertaken to study the effectiveness of Shared Lane Markings to guide bicyclists and motor vehicle drivers to the correct lateral positions on the roadway and to improve motorist and bicyclist behavior in such locations.

The Manual on Uniform Traffic Control Devices (MUTCD) recommends that bike-and-chevron Shared Lane Markings be used to guide bicyclists to a safe position when the traffic lane is too narrow to be shared, alert motorists to the existence of bicyclists, encourage safe passing of bicyclists by motorists, and reduce the incidence of wrong-way bicycling. The standards and guidance developed for this marking, which are included in the 2009 MUTCD, ensure that the center of the markings is at least 11 feet from the curb face (or edge of pavement if no curb exists) when on-street parking is present. Shared Lane Markings should not be used on shoulders or bicycle lanes. The MUTCD further recommends Shared Lane Markings be reserved for roadways with a speed limit no greater than 35 mph and placed immediately after an intersection and spaced 250 feet apart or less.

A study similar to the one presented in this report found Shared Lane Markings in Gainesville, Florida led to a significant increase in bicyclists riding in the street with traffic, a small but significant increase in bicycle to curb distance (three inches), and no change in bicycle to motor vehicle distance (Pein et al., 1999). San Francisco studied two Shared Lane Marking designs - bike-in-house and bike-and-chevron – finding the latter to be the most effective. The study found significant increases in bicyclist lateral position during passing and non-passing events. Also, motor vehicles increased their distance from parked vehicles by one foot during non-passing events when a marking was present. The chevron design also decreased sidewalk riding by 35% and wrong-way riding by 80%. (Alta, 2004)

## Shared Lane Markings Detail

The design of the Shared Lane Marking used in this experiment is shown in Figure 1. This design was recommended by the National Committee on Uniform Traffic Control Devices' Bicycle Technical Committee and measures 3.25 feet wide by 9.25 feet tall and is unmistakably similar to the Shared Lane Marking described in the 2009 MUTCD. The Shared Lane Markings were always placed in a manner consistent with the applicable MUTCD standards and guidance. In this paper, Shared Lane Markings are referred to as sharrows—a common shortening of 'share the road arrow.'

Thermoplastic sharrows were purchased for \$123 each and were installed by a crew of five City of Austin employees for \$69 each. In a single day, the crew could install up to 30 markings for a total cost of \$5,760.

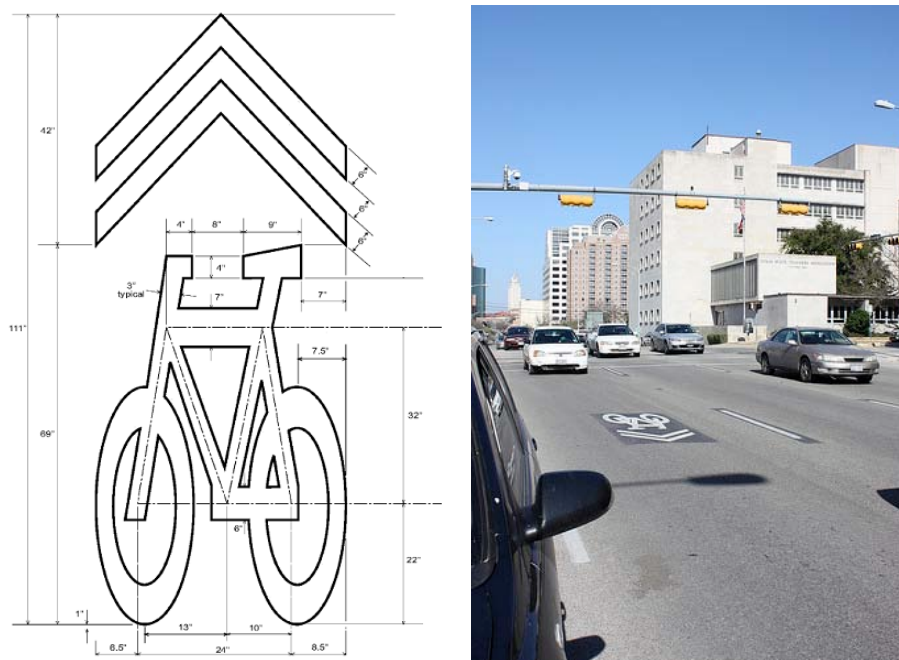


Figure 1. A drawing and photograph of the Shared Lane Marking used in this study




## Site Descriptions

Shared Lane Markings were installed along three unique multi-lane facilities in Austin. Prior to the installation of the sharrows, these facilities were designated as 'low ease of use' for bicyclists by the City of Austin due to a combination of high traffic volume, narrow outside lanes, and difficult connections. At all sites, the AM peak was defined as times between 6:00 AM to 10:00 AM and the PM peak was defined between 4:00 PM and 7:00 PM.


### ***Along Guadalupe Street between W 20<sup>th</sup> Street and W Cesar Chavez Street***

Between W 20<sup>th</sup> Street and W Cesar Chavez Street, Guadalupe Street is a four lane, one-way southbound street that extends from the southern edge of campus to the southern end of downtown. Before the study began, Guadalupe was a common corridor for bicyclists despite heavy traffic and narrow outside lanes. Sharrows were installed at the beginning of each block in the center of both the rightmost and leftmost vehicle lanes, which are 11 feet wide. An additional pair of sharrows was placed on the north side of the intersection of Guadalupe and 12<sup>th</sup> Street to assist with data collection. A cross-section of the street is shown in Figure 2. Typical AM peak traffic volumes ranged from 800 vehicles per hour to 1100 vehicles per hour, while PM peak traffic volumes were as high as 1650 vehicles per hour. The posted speed limit on the studied section of Guadalupe Street is 30 mph.

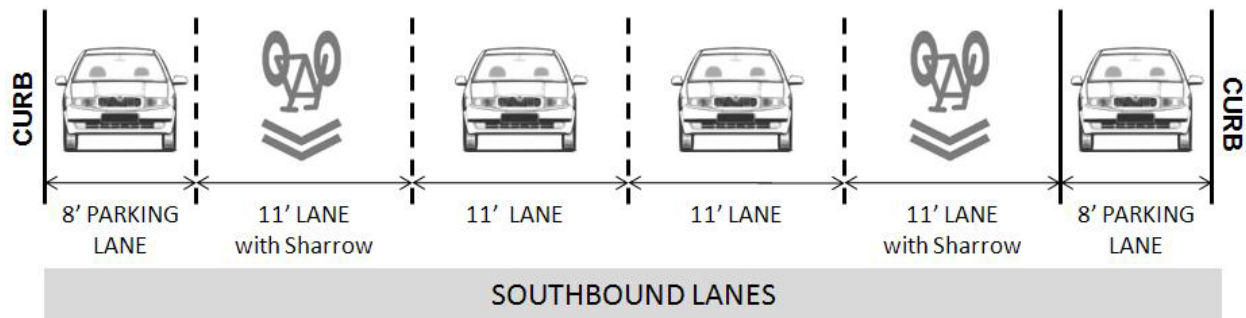

**Figure 2. A cross-section of Guadalupe Street approaching the intersection with 12<sup>th</sup> Street**


Data was collected by a traffic camera mounted at the intersection of Guadalupe and 12<sup>th</sup> Streets in downtown Austin. The camera was positioned to record southbound traffic as it approached 12<sup>th</sup> Street. One unique feature of the Guadalupe site is that on-street parking is provided along both sides of the facility, represented by the shaded area in Figure 3. During peak commuting hours (when data was collected) the parking spaces were rarely full, allowing bicyclists to bypass queues by riding in the empty parking spaces.

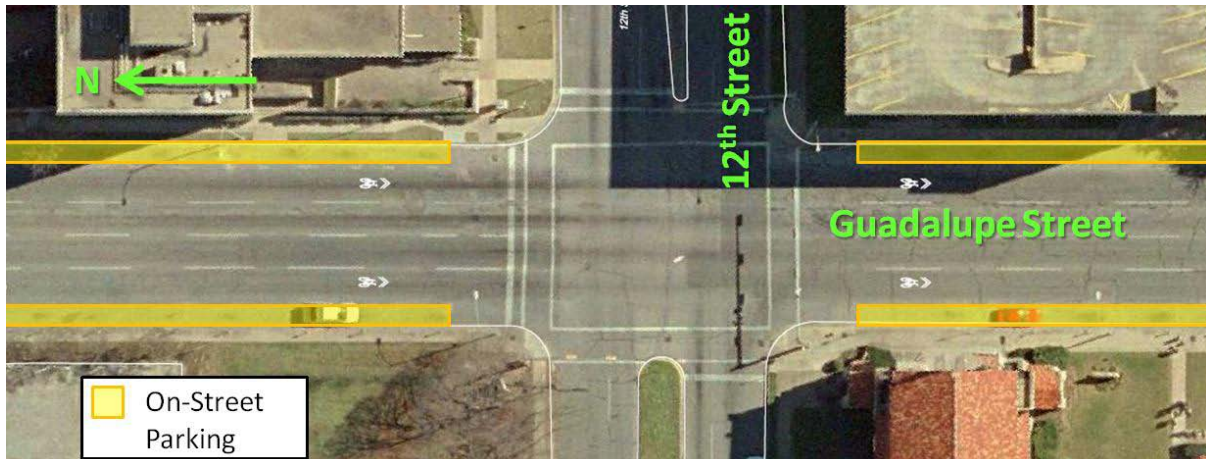

**Figure 3. A map of the intersection of Guadalupe and 12th Street**


***Along E 51<sup>st</sup> Street between Airport Boulevard and IH-35***

E 51<sup>st</sup> Street is a popular four-lane arterial that connects the suburban neighborhoods of north-central and north-east Austin. The facility has bicycle lanes west of Airport Boulevard and east of IH-35, but the lane width between Airport Boulevard and IH-35 is narrow, forcing bicyclists and motorists to share the road. In order to increase the bicycling appeal of this route, sharrows were placed along both the east and west-bound directions of this segment in the center of the lane. A cross-section of the site is shown in Figure 4.

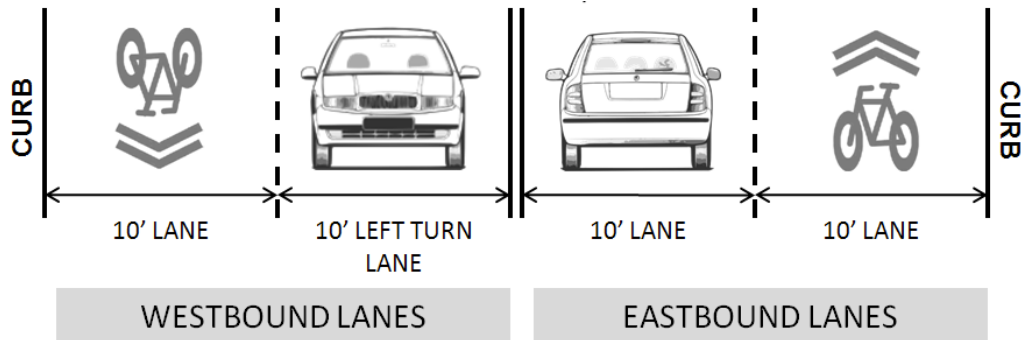

**Figure 4. Cross-section of Westbound 51st Street approaching the intersection with Airport Boulevard**


A traffic camera located at the intersection of Airport Street and E 51<sup>st</sup> Street captured traffic moving in both directions along the eastern leg of the E 51<sup>st</sup> Street and Airport Boulevard intersection. Traffic volumes were typically around 400 vehicles per hour in both the AM and PM peak periods and the speed limit is 30 mph. Bicyclists approaching the intersection (traveling west) were presented with different traffic conditions than bicyclists departing the intersection (traveling east). In order to account for these differences, each direction was considered separately. Figure 5 shows a sharrow installed at the study location on E 51<sup>st</sup> Street.

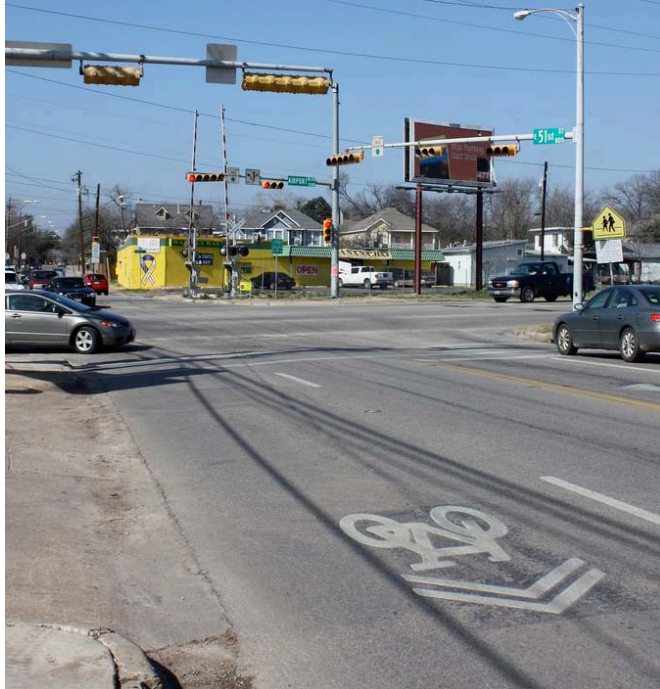

**Figure 5. Shared Lane Marking installed on E 51st Street**


***Along Dean Keeton Street between San Jacinto Boulevard and Guadalupe Street***

Dean Keeton Street is an east-west arterial that runs along the north side of The University of Texas at Austin campus. In Summer 2009, bicycle lanes were installed for the segment of Dean Keeton Street east of San Jacinto Boulevard as well as where space permitted on segments of Dean Keeton Street west of San Jacinto Boulevard. Where space did not permit the installation of bicycle lanes in accordance with City of Austin standards, sharrows were installed in August 2009. A cross-section of the roadway is shown in Figure 6. This paper compares the data collected after the installation of the bicycle lanes to the data collected after the installation of the sharrows.

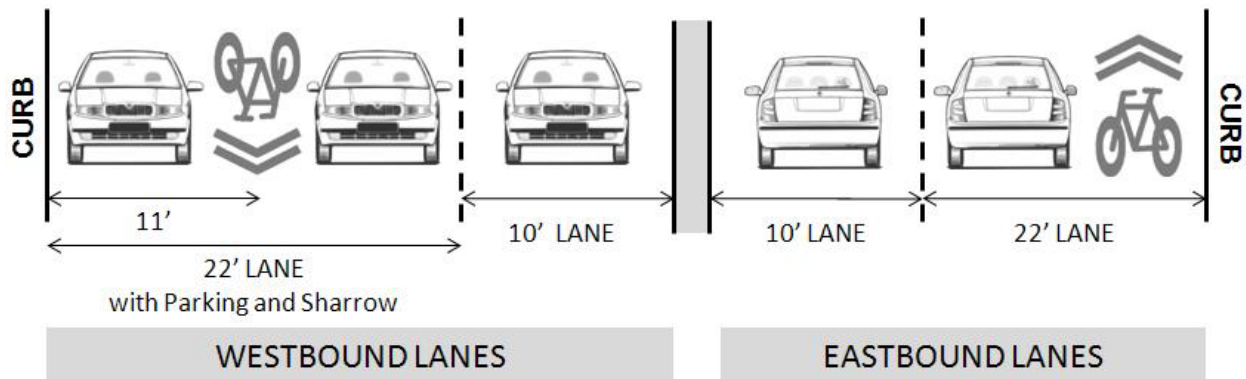

**Figure 6. Cross-section of Westbound Dean Keeton Street departing the intersection with San Jacinto Boulevard**

Data for this site was collected from a vantage point above the west leg of the intersection of Dean Keeton Street and San Jacinto Boulevard. Traffic volume along Dean Keeton Street was typically around 500 vehicles per hour and the speed limit is 35 mph. From this location, bicyclists were recorded traveling westbound just after departing the intersection. Sharrow markings were not installed in the center of the lane, but rather off to one side. In accordance with MUTCD standards, sharrow markings were centered 11 feet from the curb, leaving 11 feet between the sharrow's center and the next full lane. Figure 7 shows the studied segment of Dean Keeton Street near San Jacinto Boulevard.

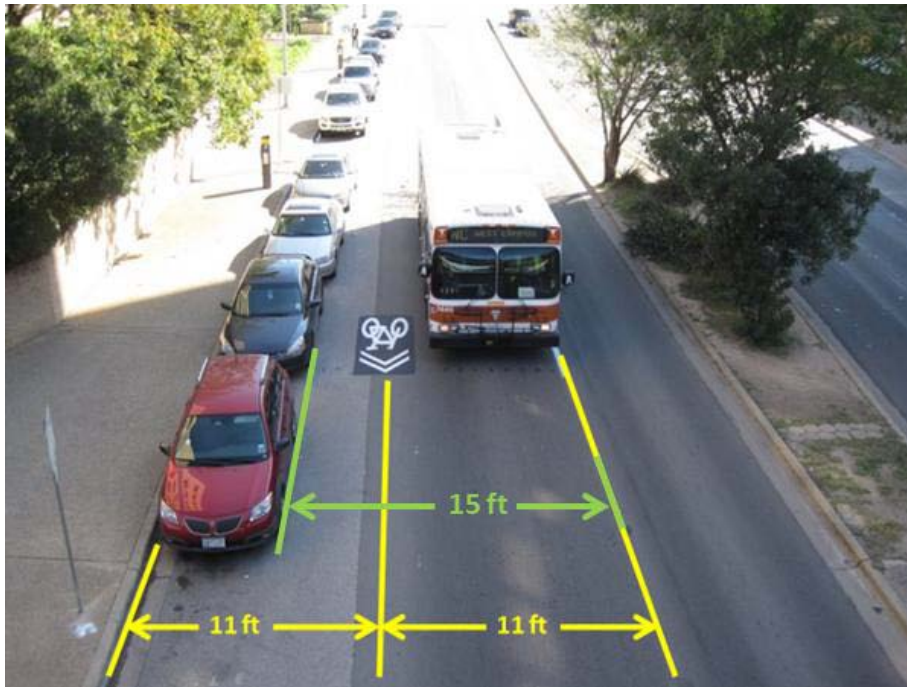

**Figure 7. Shared Lane Marking position near the study site on Dean Keeton Street**


## Experimental Design and Research Methodology

In order to measure and evaluate bicyclist and motorist behavior, video footage of traffic movements at each site was collected. Video was recorded during the typical morning and afternoon peak periods for non-campus sites. Sites near campus were recorded during the morning peak period and from 2-5pm, when traffic leaving the university seemed to be highest. Video was played back on flat panel monitors for analysis and a transparency placed over the screen allowed measurements of bicyclist and motorist lateral position to be recorded. Measurements taken on Guadalupe Street had a resolution of one-tenth of a lane width (13.2 inches), E 51<sup>st</sup> Street had a resolution of one foot (12 inches), and Dean Keeton Street had a resolution of one-tenth of a lane width (18 inches).

The primary goal of this study was to determine what effect, if any, sharrows have on bicyclist and motorist safety. Therefore, before-sharrow and after-sharrow data for each site were compared to determine if safer conditions existed after the installation. For this study, safety was defined along the following lines. First, safe bicyclist behavior was defined by three factors: (1) riding in the lane position indicated by the sharrow, (2) not riding outside of the lane (on the sidewalk or in empty parking spaces), and (3) not riding alongside queues of stopped vehicles. Second, safe motorist behavior was defined by three factors: (1) motorists give adequate space to bicyclists when passing, (2) motorists did not encroach on adjacent lanes when passing, and (3) motorists make complete lane changes when passing.

To evaluate safety as defined above, several elements of the environment, bicyclist behavior, and bicyclist-motorist interaction were recorded. Although no single measurement can comprehensively measure bicyclist and motorist safety, the improvement of several safety indicators can contribute to the conclusion that safety is indeed improved. Among the measurements taken were: traffic volume, position of motor vehicles and bicycles during passing and non-passing events, percent of motor vehicles that change lane to pass or make an incomplete passing maneuver, percent of bicyclists traveling with traffic (as opposed to against traffic or on sidewalks), and percent of bicyclists who bypassed a queue of stopped vehicles. Figure 8 illustrates how measurements of the lateral position of bicyclists (LPB) and motorist (LPM) were recorded.



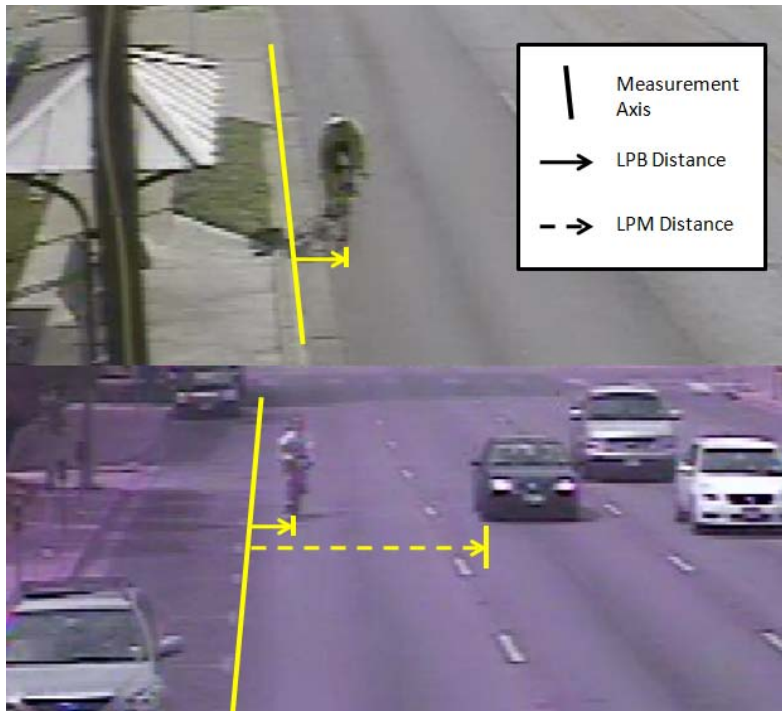

**Figure 8. Method for taking LPB and LPM measurements using different measurement axes**

Tests of statistical significance were conducted to determine if there were any notable differences between the before and after data. All proportions and means were compared using a two-sided test of equality, where the null hypothesis was that no change occurred and the alternative hypothesis that behavior changed. Educational information was not distributed to the public so that the device's impact could be measured without interference. However, Austin citizens were involved in the proposal's development. Bicyclists were solicited for their preferences for experimental locations, an opportunity for citizen comment was provided when the Austin City Council voted to fund this project, and a presentation of the proposal has been given to the City's Bicycle Advisory Committee where further comments from citizens were noted.

## Terminology

The following terms are used throughout this paper to characterize the actions of bicyclists and motorists at the various sharrows sites.

- Lateral Position of Bicyclist (LPB) – LPB is a measure of the bicyclist’s position within the lane. Due to geometric differences, LPB was measured in a manner most consistent with each site’s unique configuration. On 51<sup>st</sup> Street, LPB was measured as the lateral distance between the bicyclist’s front wheel and the curb. On Guadalupe Street, LPB was measured as the lateral distance between the bicyclist’s front wheel and the on-street parking space delineation marking. On Dean Keeton, no parking space delineation marking existed, so LPB was measured as the lateral distance between the bicyclist’s front wheel and the parked motor vehicle.
- Lateral Position of Motorist (LPM) – LPM is defined as the distance between the motorist’s curb side wheel and the appropriate measurement point—curb, delineation marking, or parked motor vehicle—as explained in the LPB definition.
- Stronger (or Weaker) Lateral Position – A strong lateral position is one that is far from the curb. A bicyclist riding in the middle of the lane is said to have a stronger lateral position than a bicyclist riding alongside the curb.
- Avoidance Maneuver – An avoidance maneuver was recorded whenever a bicyclist rode outside of the lane (e.g. rode on the sidewalk or in empty on-street parking spaces).
- Bypass the Queue –When a bicyclist was observed riding around a queue of stopped vehicles, the bicyclist was recorded as bypassing the queue.
- Passing Event (P) – A passing event was recorded when a motorist who previously shared the lane with a bicyclist pulled around the bicyclist. The measurements of LPB and LPM were taken simultaneously at the instant the front edge of the bicycle drew even with the front edge of the passing motorist.
- Non-passing Event (NP) - A non-passing event was recorded when a bicyclist rode past our camera and a passing event did not take place.
- Incomplete Passing Event - An incomplete passing event was recorded when the motorist passed a bicyclist without changing lanes.
- Encroachment – Encroachment was recorded when a passing motorist occupied two lanes while passing.

## Results

The following section describes the results of the study. Although many pieces of information were collected about bicyclist and motorist behavior, the measured lateral positions of bicyclists and motorists, as well as information about sidewalk riding proved to be the most revealing and are studied in detail below. Table 1 shows the number of observations gathered from each of the two study sites. Additional data on average number of bicyclist per hour organized by hour of the day and day of the week is included in Appendix A, which can be found at the end of this report.


**Table 1. Non-passing and passing events at the four study sites**

	Before Sharrows			After Sharrows		
	Non-Passing	Passing	Total	Non-Passing	Passing	Total
Guadalupe Street	260	129	<b>389</b>	203	26	<b>229</b>
Dean Keeton Street	152	151	<b>303</b>	85	65	<b>150</b>
E 51 <sup>st</sup> Street Westbound	75	14	<b>89</b>	60	5	<b>65</b>
E 51 <sup>st</sup> Street Eastbound	42	34	<b>76</b>	40	57	<b>97</b>




**Southbound on Guadalupe Street at 12<sup>th</sup> Street**

Figure 9 shows the distribution of LPB during mid-block travel on Guadalupe Street. Note that the center of the sharrow was placed 5.5 feet from the parking space delineation markings. After the sharrows were installed, the average LPB increased by 4.4 inches from 3.14 feet to 3.51 feet. More importantly, the mode increased from 1.1 feet to 5.5 feet. Figure 6 shows that the percentage of bicyclists riding in the center of the lane (defined as LPB between 4.4 and 6.6 feet) increased significantly from 31% to 42% after the installation of the sharrows. Overall, the lateral position data suggests that the sharrow encouraged bicyclists to ride with a stronger lateral position and more predictably than before. This trend is also evident in the substantial decrease of bicyclists observed riding further than 7 feet from the lane edge. A significant change in LPB during passing events was not observed at this site.

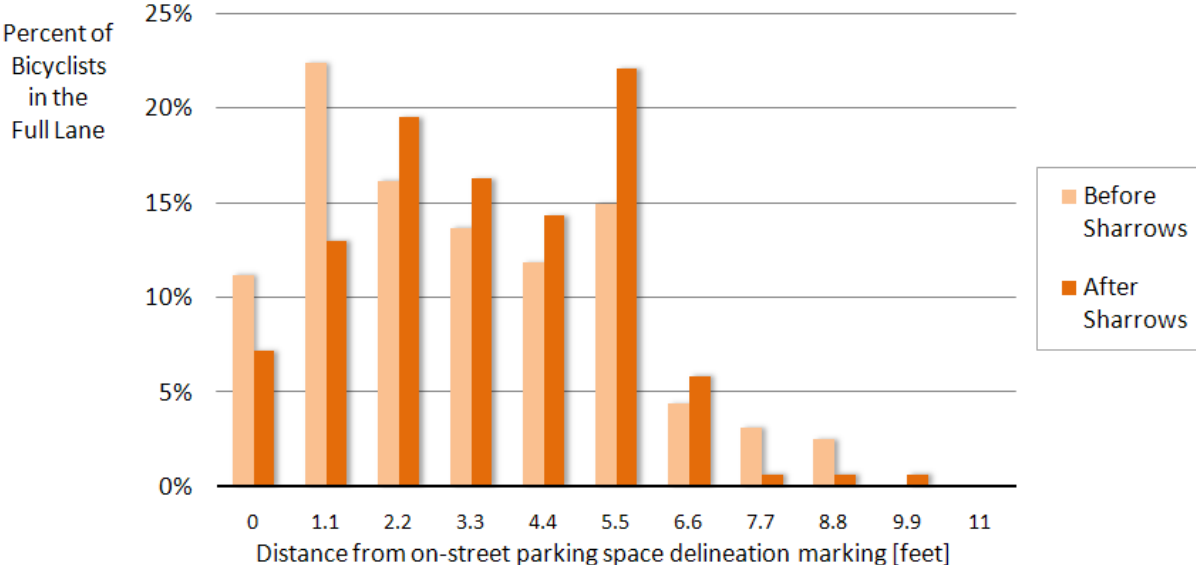

**Figure 9. Distribution of bicyclist lateral position along Guadalupe Street during non-passing events**


The histogram in Figure 10 shows four statistically significant results that suggest sharrows have a substantial influence on both motorist and bicyclist behavior. First, bicyclists were less likely to make an avoidance maneuver after the implementation of the sharrow and motorists were more likely to change lanes while passing after the implementation of the sharrow. Another interesting comparison shows that while bicyclists were less likely to make an avoidance maneuver, they were more likely to bypass a queue of stopped vehicles after the sharrows were in place. This may suggest that the sharrow encouraged bicyclists to assert themselves more when sharing the roadway with motorists.

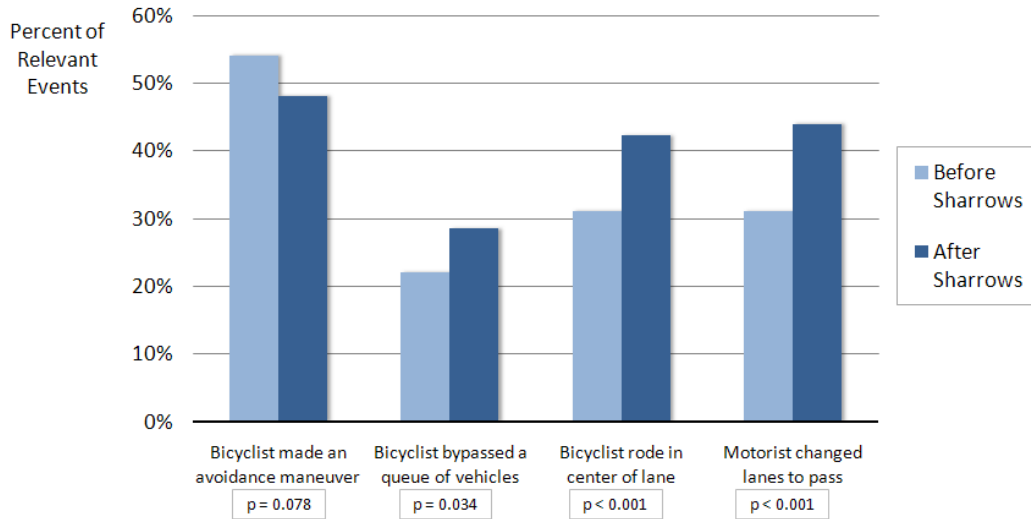

**Figure 10. Notable comparisons on Guadalupe Street**


***Westbound Along E 51<sup>st</sup> Street Approaching Airport Boulevard***

In general, the improvements safety observed on Airport Boulevard are similar to those seen on Guadalupe Street. As Figure 11 illustrates, bicyclists approaching the intersection of E 51<sup>st</sup> Street and Airport Boulevard were observed riding between one and ten feet from the curb face at mid-block. After the sharrows were installed, bicyclists tended to take a stronger position in the lane as evidenced by the increase in average LPB by 8 inches from 4.0 feet to 4.75 feet. As was the case on Guadalupe Street, the most significant result may be the increase in mode from 3 feet to 5 feet. Figure 12 shows that the proportion of on-street bicyclists who rode in the center of the lane (defined as an LPB between 4 and 6 feet) increased from 44% to 54%. The results for LPB or LPM during passing events are not presented because so few passing events were recorded in this direction—see Table 1. Since bicyclists approaching the intersection with Airport Boulevard often faced a queue of vehicles at low speeds, there were fewer opportunities for a passing event to occur.

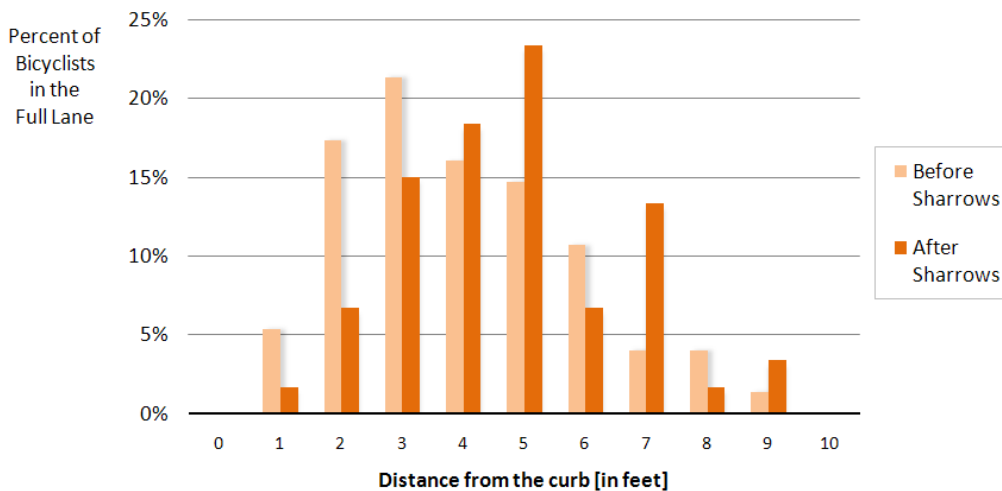

**Figure 11. Distribution of bicyclist lateral position approaching Airport Boulevard during non-passing events**


Figure 12 compares notable bicyclist behaviors before and after the implementation of the sharrows. Both the percentage of bicyclists who bypassed a queue or who made an avoidance maneuver remained unchanged after the installation of the sharrows. This may suggest that bicyclists on E 51<sup>st</sup> Street choose to ride on the sidewalk or ride around a queue of stopped vehicles for convenience, not for perceived lack of safety. The presence of the Shared Lane Marking led to a significant decrease—from 12% to 4%--of bicyclists riding against traffic on the sidewalk. As mentioned previously, the proportion of bicyclists riding in the center of the lane did increase substantially; indicating sharrows can be effective at encouraging bicyclists to take a strong position in the full lane.

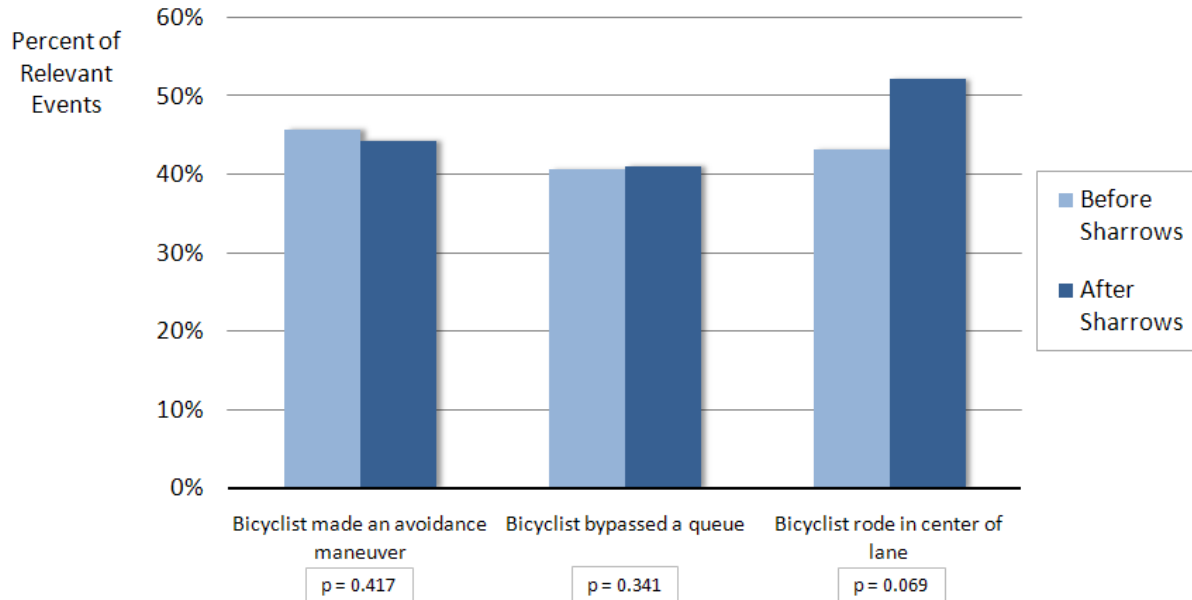

**Figure 12. Notable comparisons on E 51st Street westbound approaching Airport Boulevard**


**Eastbound Along E 51<sup>st</sup> Street Departing Airport Boulevard**

Bicyclists departing the intersection of E 51<sup>st</sup> Street and Airport Boulevard were frequently passed by motorists. Relative to the LPB measured on other sites, bicyclists on E 51<sup>st</sup> Street took a very weak position in the lane during passing events. Figure 13 compares the LPB before and after the implementation of the sharrows. After the sharrow installation, the mode increased from 1 foot to 2 feet and the percent of bicyclists riding in the middle of the lane increased significantly. This shift suggests that when a sharrow is present, bicyclists are willing to take a stronger position in the lane, even when being passed.

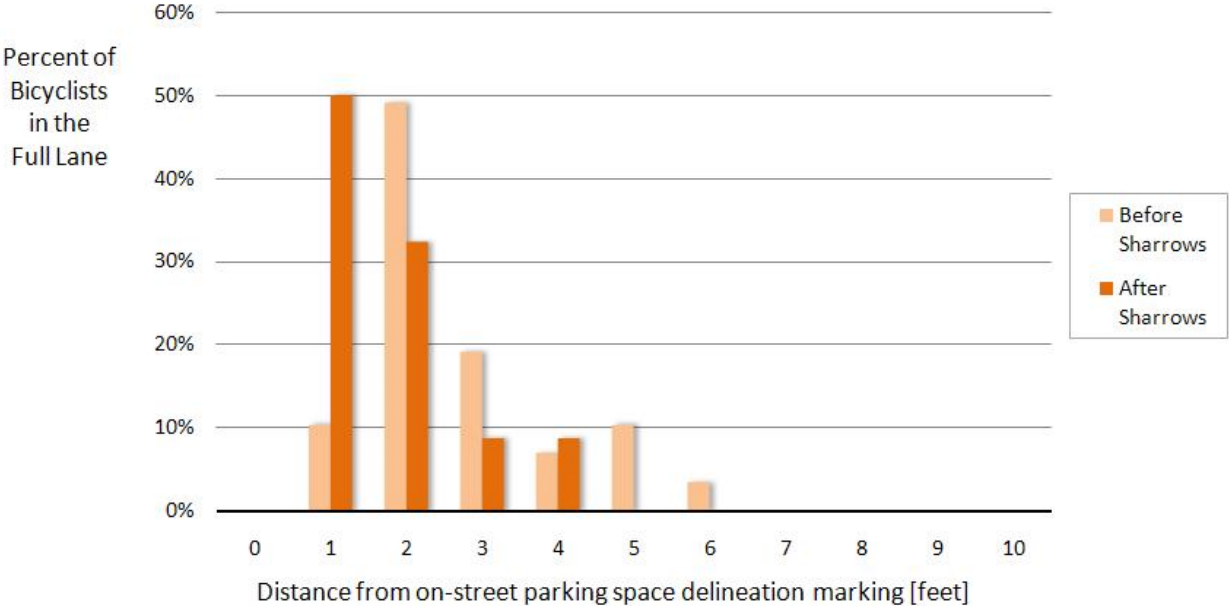

**Figure 13. Distribution of bicyclist lateral position on E 51st Street departing Airport Boulevard during passing events**

Avoidance maneuvers were relatively rare at this site and after the installation of the Shared Lane Markings the proportion of avoiding bicyclists decreased further as illustrated in Figure 14. The percentage of bicyclists occupying the center of the lane (defined as LPB between 4 feet and 6 feet) during non-passing events increased significantly. This change, along with the substantial increase in bicyclists riding in the center of the lane during passing events suggests that the sharrow markings encouraged bicyclists to properly share the road with vehicles, even when faced with a high number of passing events. Although not shown in Figure 14, the presence of the sharrow marking led to a significant decrease—from 12% to 4%—of bicyclists riding against traffic on the sidewalk along E 51<sup>st</sup> Street.

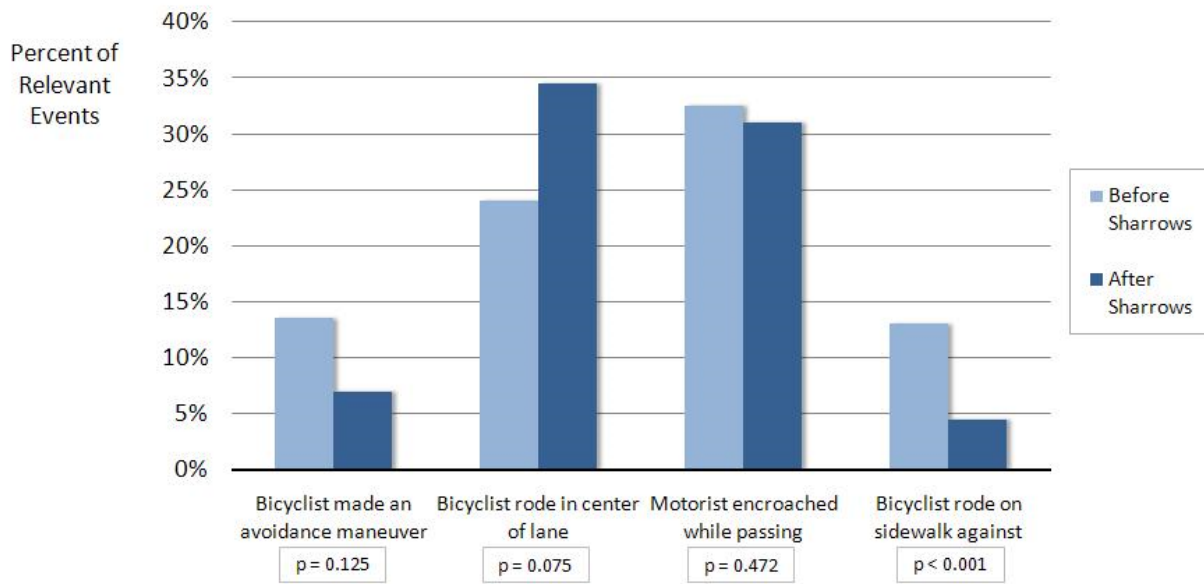

**Figure 14. Notable comparisons on E 51st Street Eastbound departing Airport Blvd**

### Westbound on Dean Keeton Street at San Jacinto Boulevard

As mentioned in site description, the unique site geometry and the fact that bicyclists departing an intersection are frequently passed by motorists made bicyclist safety during passing events a key concern for this site. Figure 15 and Figure 16 compare bicyclist lateral position before and after the sharrow installation for both passing and non-passing events, respectively. The most significant trend suggests that after the sharrow installation, bicyclists tend to behave more predictably. In the before conditions, bicyclist position during passing events varied between 1.5 feet and 4.5 feet, while after the installation, nearly 70% of bicyclists rode at 3 feet. A similar but less pronounced trend can be observed for non-passing events. Although the decrease in standard deviation of LPB during passing events is noticeable, tests show that the change is not statistically significant ( $p=0.363$ ). Together, this information suggests that the sharrow can substantially influence the consistency of bicyclist lateral position.




**Figure 15. Distribution of bicyclist lateral position on Dean Keeton Street during non-passing events**



**Figure 16. Distribution of bicyclist lateral position on Dean Keeton Street during passing events**

*Note: Although LPB could be measured up to 15 feet from the edge of the on-street parked vehicles, no bicyclists were observed riding at a position greater than 9 feet from the edge of on-street parked vehicles.*

As illustrated in Figure 17, instances of bicyclist avoidance decreased substantially after the sharrows were installed and the proportion of passing motorists who encroached on the adjacent lane decreased as well. This change, coupled with the increased predictability of bicyclist position during passing events, suggests that motorists feel more comfortable passing bicyclists when the sharrow is present and are therefore less likely to encroach on the adjacent lane when passing. (Note that the dimensions of Dean Keeton Street do not require motorists to change lanes to pass.) Taken together, these results suggest that sharrows can be effective as a tool to connect areas where bicycle lanes are not continuous.

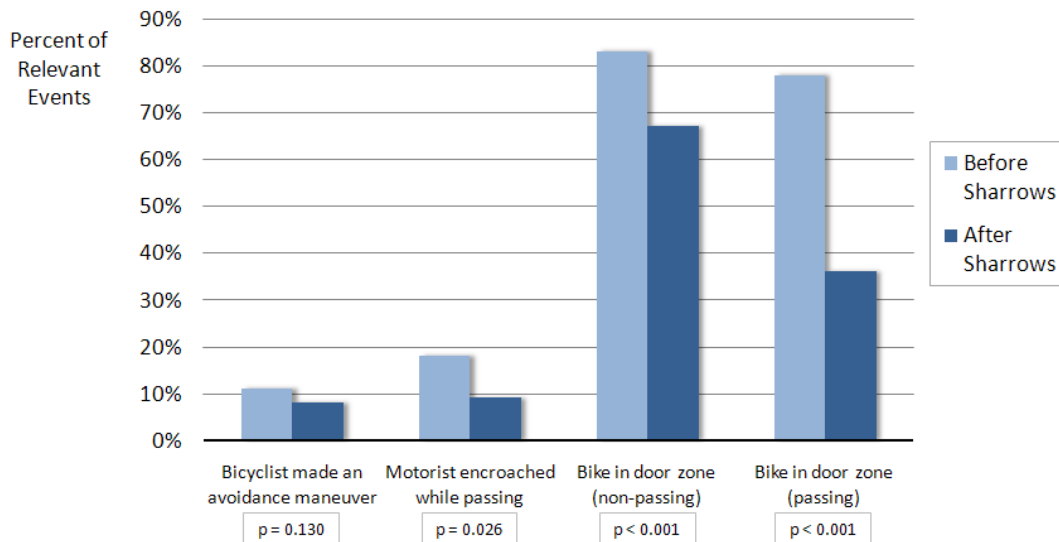

**Figure 17. Notable comparisons on Dean Keeton Street**

## Conclusions and Recommendations

The collective observations in this study strongly suggest that Shared Lane Markings can improve the safety of both bicyclists and motorists on multi-lane facilities when used as either a standalone device or as a tool to guide bicyclists between facilities with bike lanes. This study observed that after the installation of the Shared Lane Markings, bicyclists generally rode further from the curb and closer toward the center of the lane. At several sites, the Shared Lane Marking was effective at reducing unsafe bicyclist behavior (such as riding on the sidewalk or bypassing a queue of stopped vehicles). Additionally, the installation of the Shared Lane Markings resulted in improved motorist behavior when passing a bicyclist—motorists were more likely to change lanes to pass and were less likely to encroach on the adjacent lane when passing.

Given these results, we recommend that Shared Lane Markings be employed on multi-lane facilities where the facility cannot be reasonably adjusted to accommodate a bike lane. This study found that Shared Lane Markings improved bicyclist and motorist behavior on sites with posted speed limits of 30 mph and with peak traffic volumes between 400 and 1650 vehicles per hour. Shared Lane Markings can be effective on such facilities as a stand-alone device (as evidenced by the Guadalupe site) or as a means to connect two bike lane facilities (as evidenced by the 51<sup>st</sup> Street and Dean Keeton sites).

As observed on Dean Keeton Street, Shared Lane Markings can be particularly effective at removing bicyclists from the door zone of on-street parked vehicles. The Dean Keeton Street site saw the average bicyclist lateral position increase only marginally, however, this small average increase in bicyclist lateral position resulted in a significant decrease in the proportion of bicyclists who were in the door zone during both passing and non-passing events.

We further recommend that Shared Lane Markings be placed in the center of the lane unless it is possible for bicyclists and motorists to share the lane side-by-side safely (e.g. the bicyclist is not forced to ride in the door zone of on-street parked vehicles and the bicyclist can be passed with a clear distance of at least three feet).

Further research is needed to determine if the addition of Shared Lane Markings to a facility increases bicycle use of that facility. Also, this study did not attempt to determine the effectiveness of Shared Lane Markings along single lane facilities; therefore, we cannot recommend their use on single lane facilities.



## References

Douma, F. and Cleaveland, F. "The Impact of Bicycling Facilities on Commute Mode Share." MNDOT Report No. MN/RC 2008-33, August 2008.

Bowman-Melton/Alta Planning and Design (BMA), "The University of Texas Bicycle Plan: Integrating Bikes into a Pedestrian Campus, Austin, Texas." August 2007.

Sener, I.N., Eluru, N. and Bhat, C.R. "An Analysis of Bicyclists and Bicycling Characteristics: Who, Why, and How Much are they Bicycling?", *Transportation Research Record*, 2009.


National Committee on Uniform Traffic Control Devices, Technical Committee (NCUTCD) Recommendation, "Proposed Shared Lane Marking: Part 9 of the MUTCD," January 7, 2005, Requested by NCUTCD Bicycle Technical Committee.

Pein, W.E., Hunter, W.W., and J.R. Stewart, "Evaluation of the Shared-Use Arrow," prepared for FDOT, Dec. 1999.

Alta Planning & Design, San Francisco's Shared Lane Pavement Markings: Improving Bicycle Safety, Final Report, Feb 2004.

## Appendix A: Bicycle Count Data

The following figures illustrate the level of bicycle traffic that E 51st Street, Guadalupe Street, and Dean Keeton Street received before and during the course of this study. Figures A1, A2, and A3 show the number of bicyclists recorded at each site for each hour of the day, expressed in military time (where 15 represents 1500 hours, or 3:00pm). At both Airport Boulevard and Guadalupe Street the number of bicyclists per hour was generally higher in the afternoon peak. Also, the number of bicyclists per hour at E 51st Street, and Guadalupe Street increased with time during the morning peak hours and decreased with time during the afternoon peak hours. These trends are similar to ridership trends observed on Lamar Boulevard, which was observed during a “Bicycles May Use Full Lane” sign study. There is a high, but variable number of bicycles per hour along Dean Keeton Street, so few conclusions can be drawn about bicyclist patterns at this location. The variability in bicyclist volume is most likely due to site’s close proximity to the University of Texas. The before data was collected while summer classes were in session at the University, while the after data was collected during the fall semester. The increase in bicycle volume would be due in large part to the increase in student population during the fall semester.

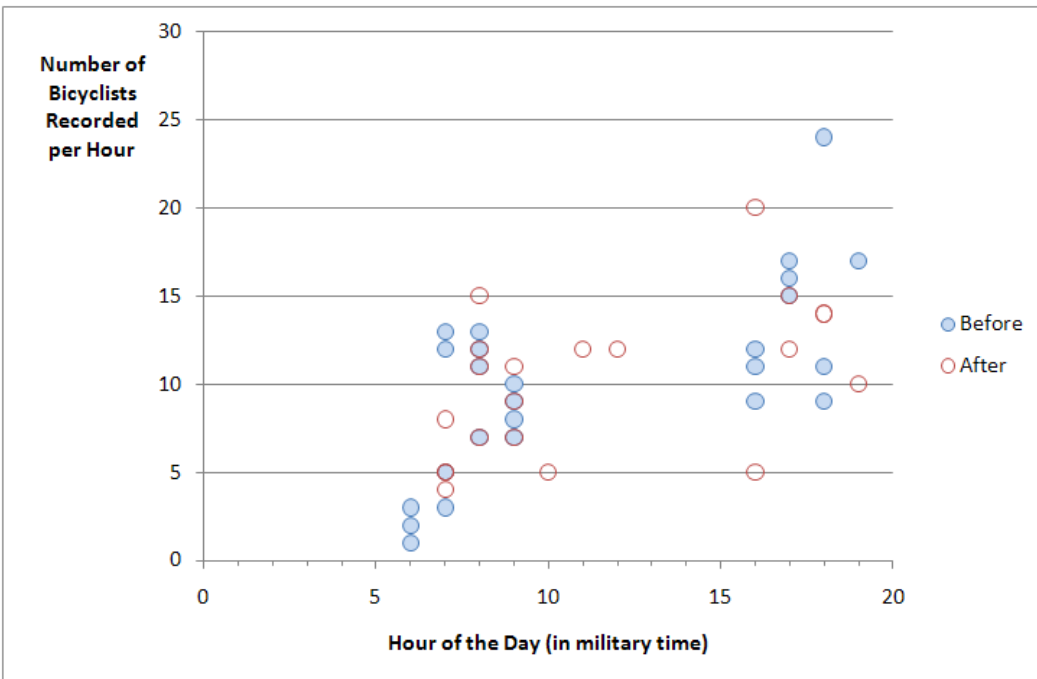

**Figure A1: Number of bicycles recorded each hour of the day on E 51st Street**  
*Note: These data points include bicyclists traveling in both directions along 51st Street*

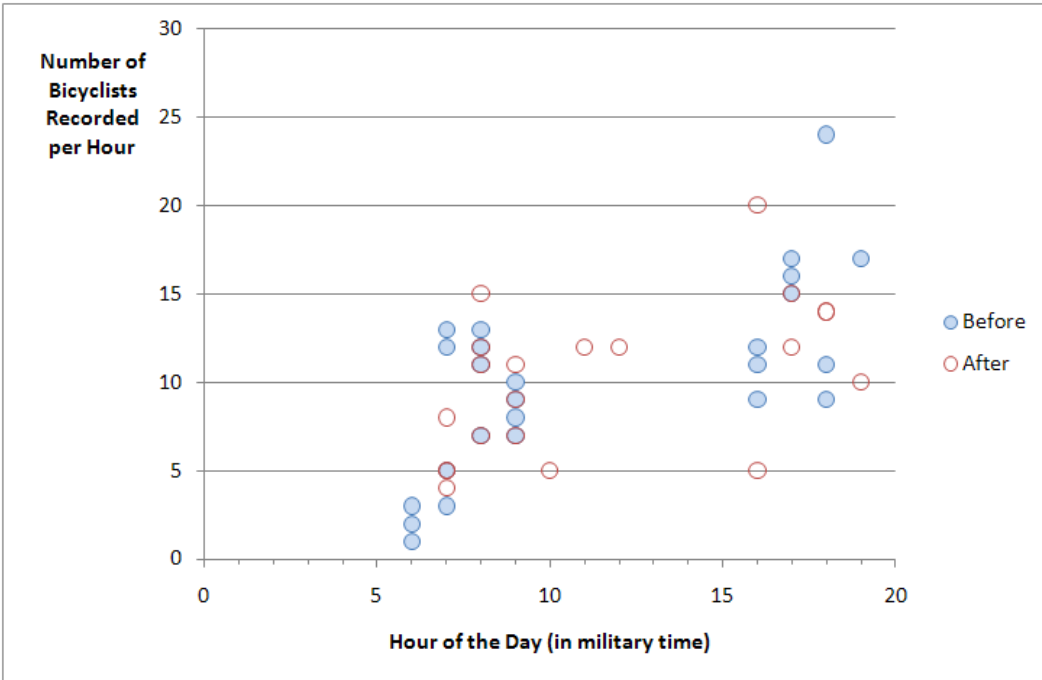


Figure A2: Number of bicycles recorded each hour of the day on Guadalupe Street


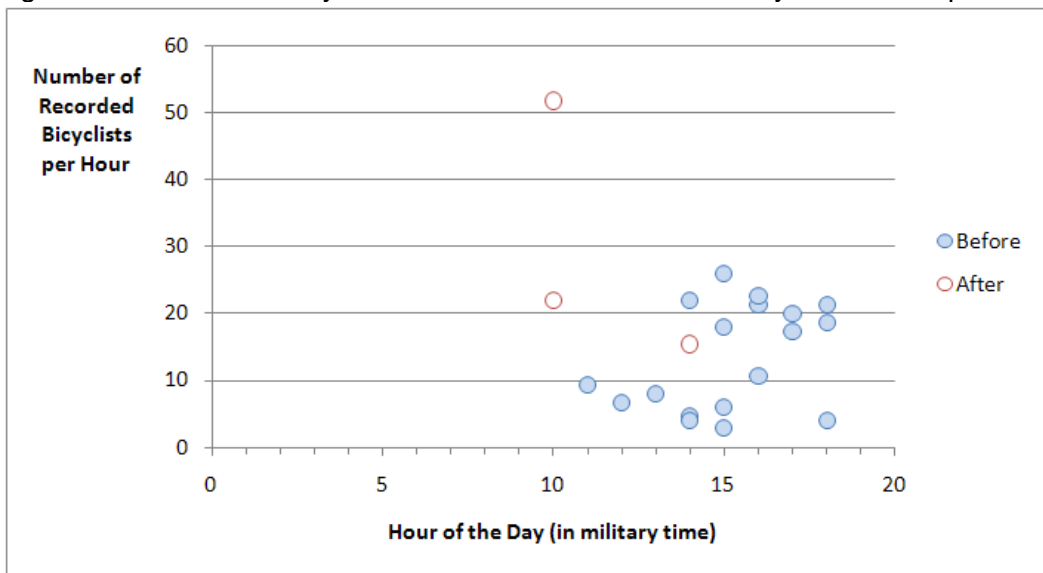


Figure A3: Number of bicycles recorded each hour of the day on Dean Keeton Street

Figures A4, A5, and A6 show the number of bicyclists recorded per hour for each day of the week along E 51st Street, Guadalupe Street, and Dean Keeton Street, respectively. AE 51st Street, experienced a higher hourly volume of bicyclists (9.9 bicyclists per hour) than Guadalupe Street (8.0 bicyclists per hour), but both volumes were relatively constant for each weekday. This trend contributes to the hypothesis that E 51st Street and Guadalupe Street are primarily used as commuter routes. The average volume along Dean Keeton was 16.1 bicyclists per hour and was relatively constant for each day of the week as well. This indicates that despite bicyclist volume varying each hour of a day, Dean Keeton Street experiences consistently high ridership each day of the week.

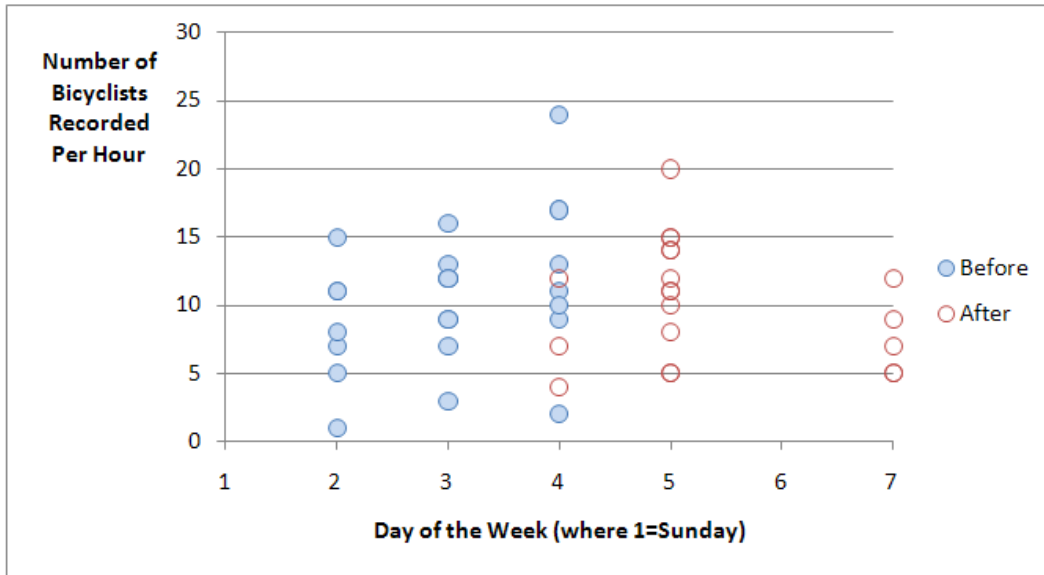

**Figure A4: Number of bicycles recorded each day of the week on E 51st Street**  
*Note: These data points include bicyclists traveling in both directions along 51st Street*

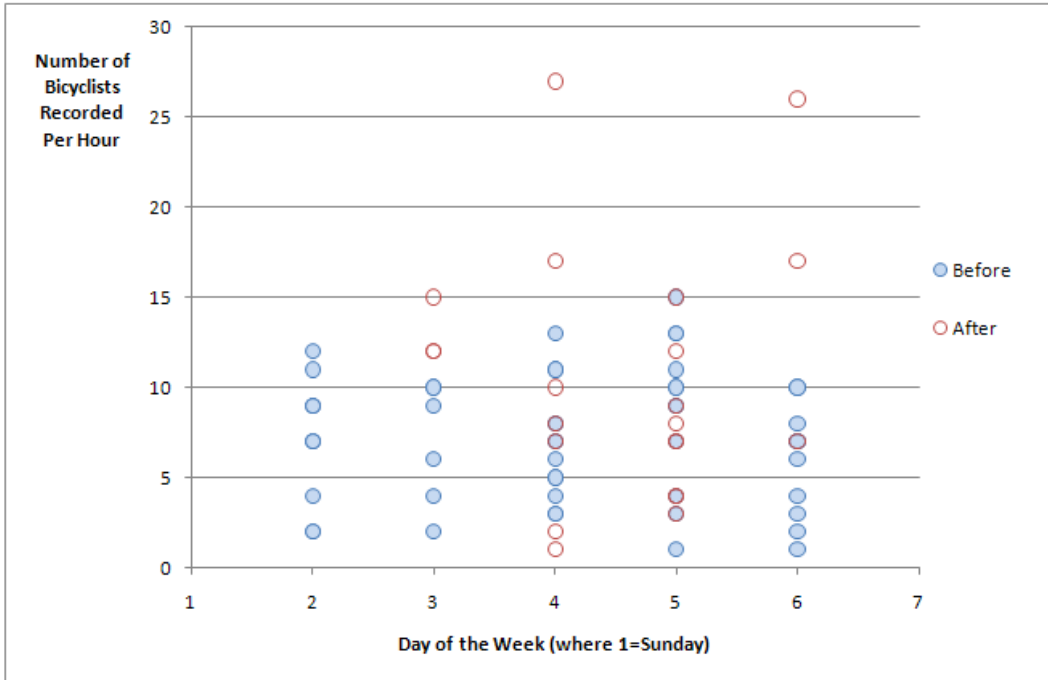


Figure A5: Number of bicycles recorded each day of the week on Guadalupe Street

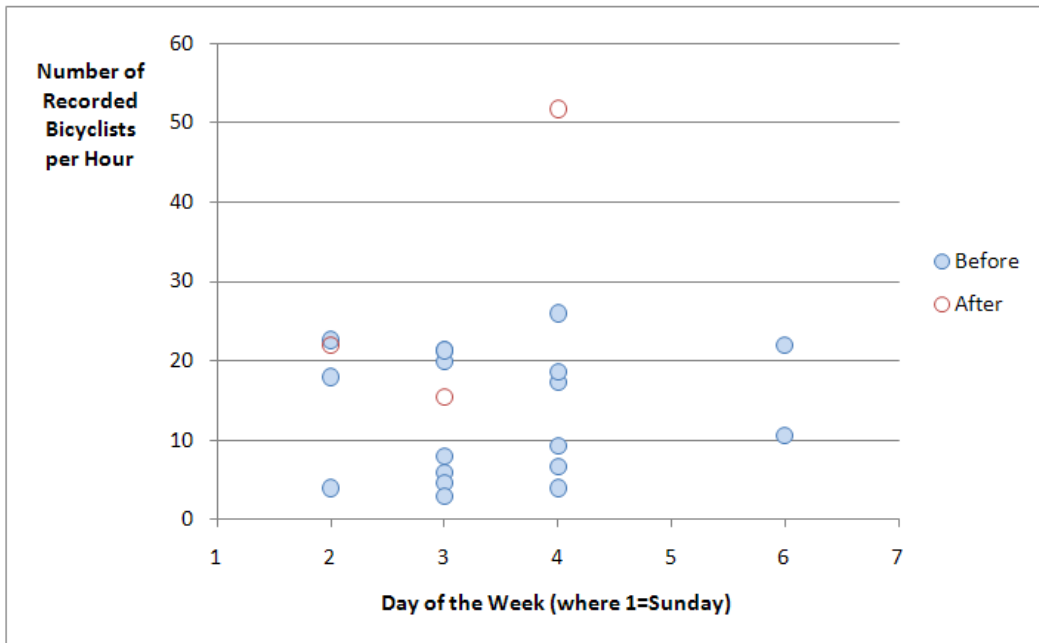


Figure A6: Number of bicycles recorded each day of the week on Dean Keeton Street